



# DC Ammeter Shunts

STD Accuracy  $\pm 0.25\%$

## TYPE L: 170 through 600 Amperes




### TYPE L: 50 mV

Catalog Number	AMP	A
L-170-50	170	1.5
L-200-50	200	1.5
L-250-50	250	1.5
L-300-50	300	1.5
L-400-50	400	1.5
L-450-50	450	1.5
L-500-50	500	1.5
L-600-50	600	1.5

### TYPE L: 100 mV

Catalog Number	AMP	A
L-170-100	170	2.07
L-200-100	200	2.07
L-250-100	250	2.07
L-300-100	300	2.07
L-400-100	400	2.07
L-450-100	450	2.07
L-500-100	500	2.07
L-600-100	600	2.07

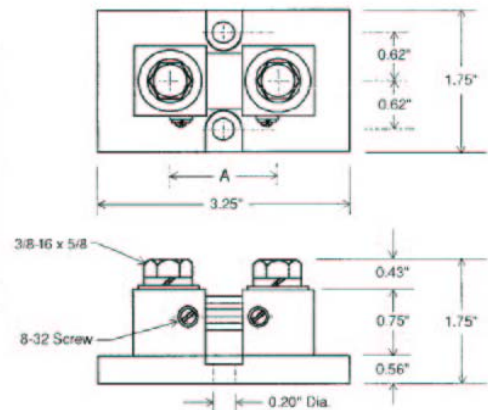

### Product Overview

- Terminal blocks made of high quality brass to allow proper heat dissipation.
- Phenolic base
- Current: 170-600 amp
- mV Output: 50mV and 100mV
- Accuracy Class: 0.5%
- Overload: 120% rated current continuously

Tolerances  $\pm .015$  for the hole diameters.  
Other tolerances  $\pm .030$  unless specified.  
Dimensions subject to change without notice.

**Panel Components & Systems, Inc.**

Tel.: 1 (800) 523-9194 ■ [www.pc-s.com](http://www.pc-s.com)