



Current Sensors

CYHCS-RC2S

Split Core Hall Effect DC Current Sensor



This Hall Effect current sensor can be used for measurement of DC and AC current, pulsed currents etc. The output of the transducer reflects the real wave of the current carrying conductor.

Product Characteristics	Applications
<ul style="list-style-type: none"> Excellent accuracy Very good linearity Light in weight Less power consumption Window structure Electrically isolating the output of the transducer from the current carrying conductor No insertion loss Current overload capability 	<ul style="list-style-type: none"> Frequency conversion timing equipments Various power supply Uninterruptible power supplies (UPS) Electric welding machines Numerical controlled machine tools Electrolyzing and electroplating equipments Electric powered locomotive Microcomputer monitoring Electric power network monitoring

Electrical Data/Input

Primary Nominal RMS Current I_r (A)	Primary Current Measuring Range I_p (A) at $V_{cc}=12V$	Aperture Diameter (mm)	Part number
30	± 60	21	CYHCS-RC2S-30A-XC
50	± 100	21	CYHCS-RC2S-50A-XC
100	± 200	21	CYHCS-RC2S-100A-XC
200	± 400	21	CYHCS-RC2S-200A-XC
300	± 600	21	CYHCS-RC2S-300A-XC
400	± 800	21	CYHCS-RC2S-400A-XC
500	± 900	21	CYHCS-RC2S-500A-XC
600	± 900	21	CYHCS-RC2S-600A-XC

Supply Voltage: X=3, $V_{cc}=+12VDC\pm 5\%$, ; X=4, $V_{cc}=+15VDC\pm 5\%$; X=5, $V_{cc}=+24VDC\pm 5\%$,
(Connector: Molex connector C=M; Phoenix Connector: C=P)

Current Consumption
RMS Voltage for 2.5kV AC isolation test, 50/60Hz, 1min,

$I_c < 25mA$
 $V_{is} < 10mA$

Output Voltage at I_r , $T_A=25^\circ C$:

$V_{out} = V_{oe} \pm 2V$

Output Impedance:

$R_{out} < 150\Omega$

Load Resistor:

$R_L > 10k\Omega$

Accuracy at I_r , $T_A=25^\circ C$ (without offset),

$X < 1.0\%$

Linearity from 0 to I_r , $T_A=25^\circ C$,

$E_L < 1.0\% FS$

Electric Offset Voltage, $T_A=25^\circ C$,

$V_{oe} = 5.0V \pm 1.0\%$

Magnetic Offset Voltage ($I_r \rightarrow 0$)

$V_{om} < \pm 15mV$

Thermal Drift of Offset Voltage,

$V_{ot} < \pm 1.0mV/^\circ C$

Thermal Drift ($-10^\circ C$ to $50^\circ C$),

T.C. $< \pm 0.1\% /^\circ C$

Response Time at 90% of I_p ($f=1k Hz$)

$t_r < 7\mu s$

Frequency Bandwidth (-3dB),

$f_b = 0-20 kHz$

Mean Time Between Failures (MTBF):

50k - 100k hours

Ambient Operating Temperature,

$T_A = -25^\circ C \sim +85^\circ C$

Ambient Storage Temperature,

$T_S = -40^\circ C \sim +100^\circ C$

Products constantly update. All specifications are subject to change without notice.

For more information on this product, please contact:

PC&S, Inc. at +1 (800) 523-9194 or +1 (973) 448-9400

www.pc-s.com

CYHCS-RC2S Current Sensor

Relation between Input Current and Output Voltage

Take the sensor CYHCS-RC2S-100A-3 as sample, the relation between the input current and output voltage is shown in the table 1, Fig.1 and Fig. 2

Table 1. Relation between the input current and output voltage

Input current (A)	-200	-150	-100	-50	0	50	100	150	200
Output voltage (V)	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0

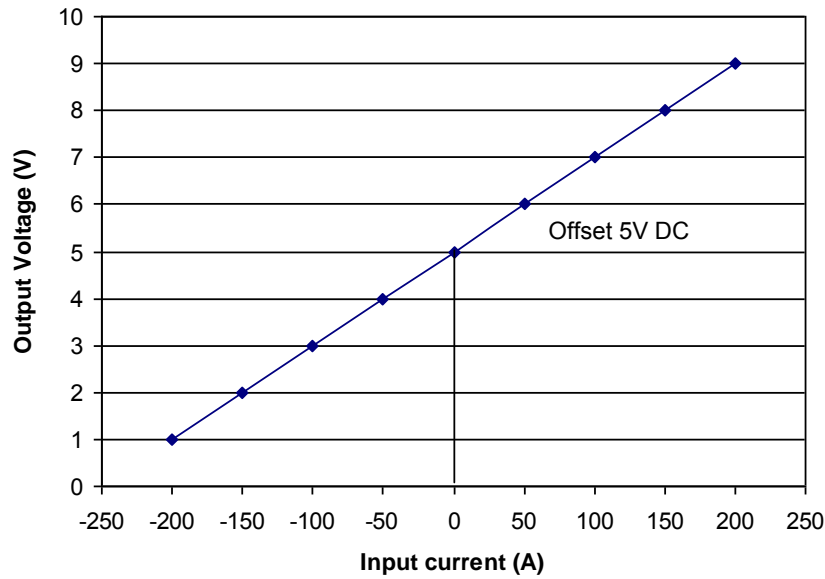


Fig. 1 Relation between the input current (DC) and output voltage (DC)


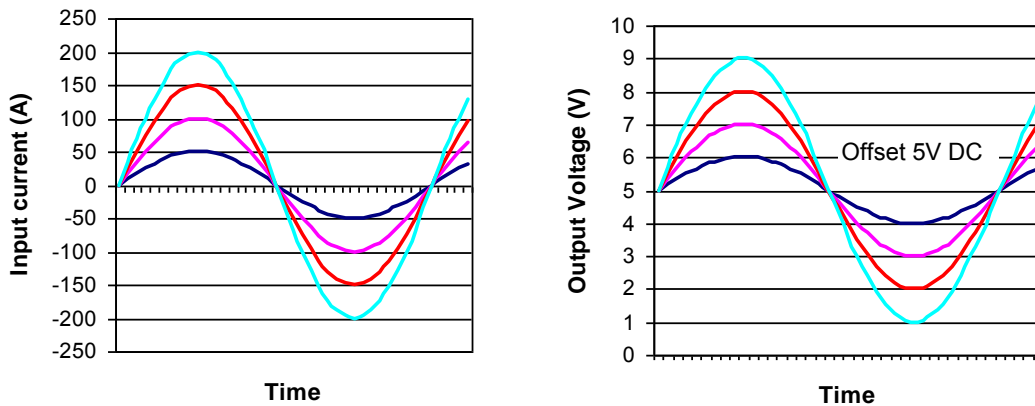



Fig. 2 Relation between the input current (AC) and output voltage (AC)

CYHCS-RC2S Current Sensor

PIN Definition and Dimensions

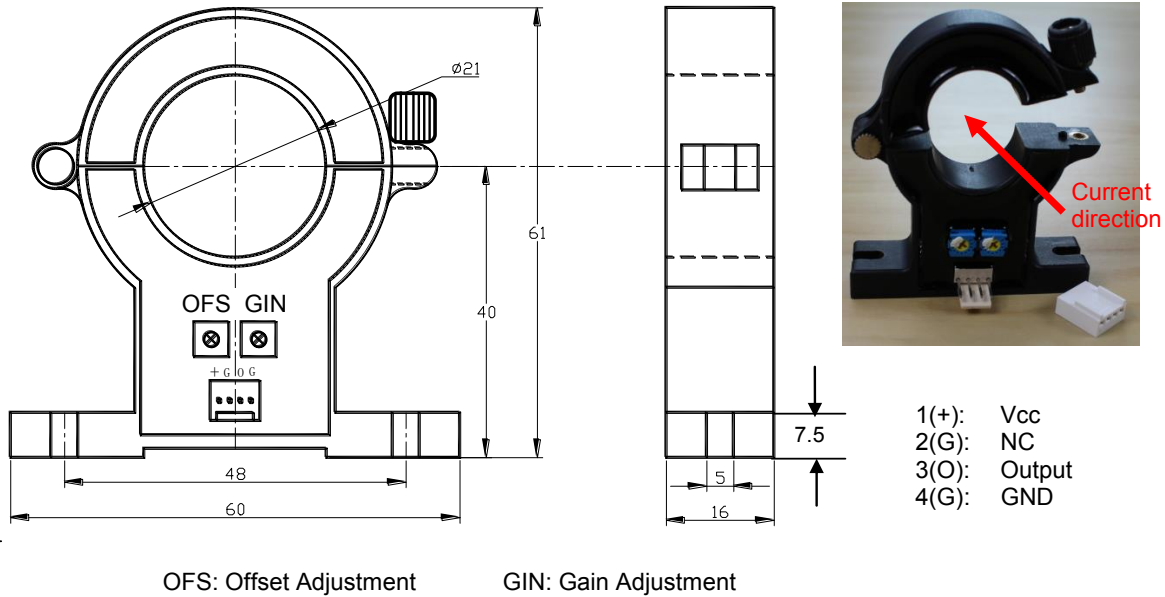

Connection

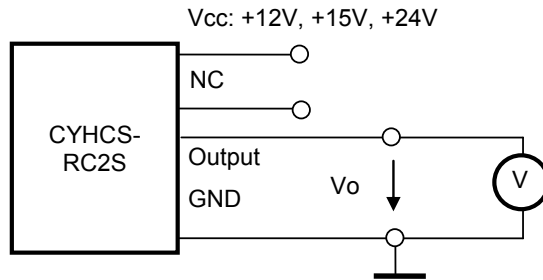



Notes:

1. Connect the terminals of power source, outputs respectively and correctly, never make wrong connection.
2. Two potentiometers can be adjusted, only if necessary, by turning slowly to the required accuracy with a small screwdriver.
3. The best accuracy can be achieved when the window is fully filled with bus-bar (current carrying conductor).
4. The in-phase output can be obtained when the direction of current of current carrying conductor is the same as the direction of arrow marked on the transducer

CYHCS-RC2S Current Sensor

DIN Rail Adapter CY-DRA88

The DIN Rail Adapter CY-DRA88 is designed for mounting the sensor on 35mm DIN Rail. It has the size 70 x 24 x 23mm. The height from bottom to mounting surface is 14.8mm.

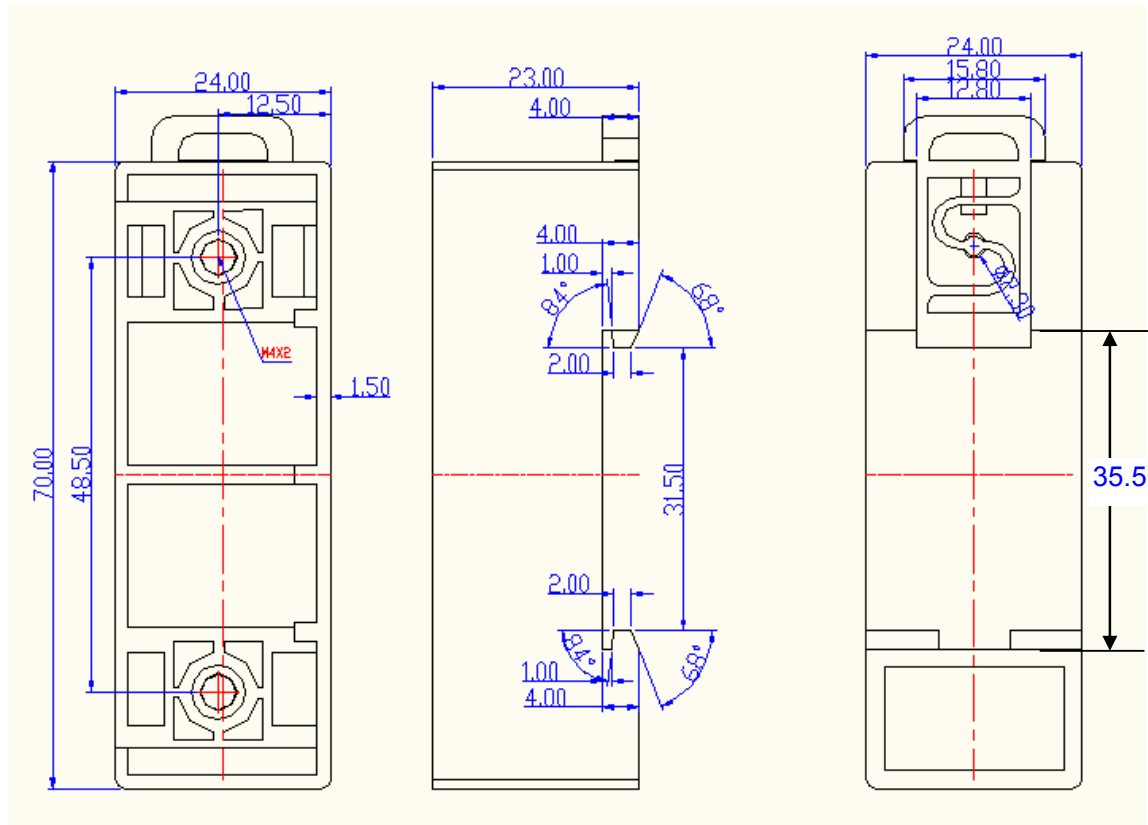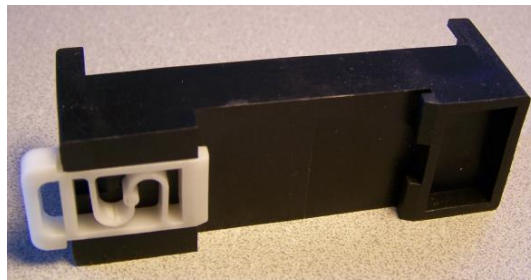

CYHCS-RC2S Current Sensor

Mounting of Sensors



Sensor with Molex Connector
(The distance between the bottom and the middle of hole is 54.8mm)



Sensor with Phoenix Connector
(The distance between the bottom and the middle of hole is 54.8mm)



www.pc-s.com

For more information and certifications, please contact:

Panel Components & Systems, Inc. ■ Phone: (800) 523-9194 ■ info@pc-s.com

Main Office:

Stanhope, NJ

Phone: (973) 448-9400