

### Main Features:

The M225 switch is designed for main and auxiliary circuits operated by hand as ON/OFF, code, gang, changeover, multi-step, instrument or motor switches. The modular design offers different switching stages which can be easily assembled and disassembled. Spring pressure keeps the bridge closed and a cam disk opens it forcibly.

- Sturdy, double-pivoted stop ensures precise switching.
- Switching stages, latching mechanisms and cover plates are bolted together to form the basic switch.
- Three cam disks per switching stage prevents unilateral lifting forces to the slide.
- Switching angles of 30, 45, 60 and 90 degrees are available.
- Dust protection cover, cylinder locking, padlockable handle options available.



### Building the Part Number ...

Mounting Units		
	A	B
Front	E03	E13
Rear	E02	E12
Front & Rear	E10	E14
Single Hole	E04	
	22.5 mm	30.5 mm
	-20	-30
Square escutcheon		
	-21	-31
Rectangular escutcheon		
	-22	-32
Without escutcheon		

See reverse side for dimensions. If rear mounting is needed, long shaft or door interlock must be specified in the order.

Escutcheon Plates			
	A	B	
Square			
Order	2PS	4PS	
Dimen. (H)	1.89"	2.52"	
Dimen. (W)	1.89"	2.52"	
Rectangular			
Order	2PR	4PR	
Dimen. (H)	1.89"	2.52"	
Dimen. (W)	2.36"	3.15"	
Combination of escutcheon and handle			
Change the last two digits of the order number to reflect your escutcheon and handle type combinations.			
Escutcheon	Legend Plate	Handle	Order No.
Black	Silver	Black	...M1/N1
Grey	Silver	Grey	...M2/N2
White	Silver	White	...M3/N3
Yellow	Yellow	Red	...M4/N4
Black	Silver	Red	...M5/N5


Handles / Operators	
<b>M-Handle (Modern)</b>	
	mm in.
	L 27 1.06
	W 37 1.46
	D 28 1.10
...M1	
<b>N-Handle (Bar)</b>	
	mm in.
	L 27 1.06
	W 27 1.06
	D 23 0.91
...N1	
<b>Also available:</b> Key operator and padlockable handle	
Standard handle: Black. See "Combinations of escutcheon and handle" table to the left for other color selections.	

### Ordering Information

- Determine basic switching design.** Standard switches may be selected from the standard switch listing. We require the number of positions; contact closure in each position.
- Select mounting unit.** Type A -- Standard Mounting -- Size 2 (S2 switches); Type B -- Larger Mounting -- Size 4 (use on S2 switches).
- If escutcheon plate** (name plate) is desired, select appropriate item.
- Choose a handle** to operate switch.

Note: If "A" is selected, choose matching units from "A" column.

# M225 25A / 600V Cam Switch



PC&S products are manufactured under a total quality system that provides total engineering integrity. Products have been engineered to satisfy specifications, performance, reliability and life cycle to exacting standards.

PC&S strives to meet customer requirements and exceed expectations. We do this through monitoring and measuring our process and product, customer satisfaction, internal auditing, analysis of production data, continual improvement including corrective and preventative action. Our quality management systems are certified in accordance with ISO 9001:2000 standards.

## AC Ratings

**Operating Voltage** Volts 600  
U/L 508 and/or CSA C22.2-14

**Continuous Current** AMPS 25

**Horsepower Rating** 120V 2  
(40-60 hz) per 240V 5

U/L 508 and/or 480V 10

CSA C22.2-14 600V 10

**Ampere Rating per** AMPS 20

U/L 508 and/or CSA C22.2-14

Make and break = 6 to 10 times  
normal current min.

**Kilowatt Rating per** 220V 4

IEC 408, 30, AC3 380V 7.5

500V 7.5

**Wire Size** AWG 10

MM<sup>2</sup> 4

## Operating Temperature

Range °F: -13°F to +122°F

Range °C: -25°C to +50°C

## Mechanical Details

### Mounting Forms

- Four hole panel mounting
- Single hole panel mounting
- Base mounting

### Handles / Operators

- M-Handle
- N-Handle
- Key Operator
- Padlockable Handle


### Options

- Dust protective cover
- Cylinder lock
- Door clutch
- Door clutch, interlock, padlock device
- Installation snap mounting

### UL Approved

For other ratings, refer to the appropriate data sheet.

## Dimensions

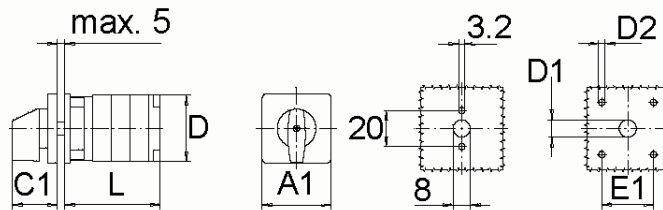

	mm	in.
A1	48	1.89
C1	31.5	1.24
D	48	1.89
D1	12	0.47
D2	4.5	0.18
E1	36	1.42

'L'	Stages	1	2	3	4	5	6	7
Dimensions	Length (in.)	1.69	2.20	2.72	3.23	3.74	4.25	4.76

Max. 12 stages. Each additional stage adds 0.51" (13mm)



**Power Measurement and Control Specialists**

1 800 523-9194 • [www.pc-s.com](http://www.pc-s.com)

Your Local PC&S Representative:

PANEL COMPONENTS & SYSTEMS, INC.  
USA: 149 Main Street, Stanhope, NJ 07874  
Telephone: (973) 448-9400 Fax: (973) 448-1674

CANADA: 213 Jespersen Ave., Spruce Grove, Alberta T7X 2J1  
Telephone: (877) 962-0557 Fax: (780) 962-0557